



DDL 200


Seite / Page 1/1

MICRO CUTTING TOOLS

HPTec MICRO-Line
für CFK und GFK Anwendungen
HPTec MICRO-Line
for CFRP and GFRP applications

Vollhartmetallbohrer
(Diamant beschichtet),
für CFK und GFK Anwendungen

Solid carbide drill
(Diamond coated),
for CFRP and GFRP applications

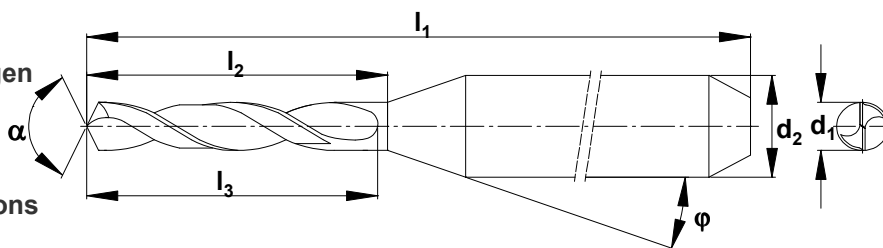

Typ	DDL 200	Typ	DDL 200
Norm	HPTec-Werknorm	Standard	HPTec Standard
Spiralwinkel	$\lambda = 34^\circ$	Helix angle	$\lambda = 34^\circ$
Zylinderschaft	DIN 6535 HA	Straight shank	DIN 6535 HA
Beschichtung	Diamant	Coating	Diamond
Schneidstoff	Vollhartmetall	Cutting material	Solid carbide

status 06.2015 technische Änderungen vorbehalten / Subject to technical alterations

d ₁	l ₃	l ₁	l ₂	d ₂	z	a	φ	α	Art. Nr. / Art. No.
[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[°]	[°]	
2,00	20,00	60,00	20,30	6,00	2	-	18	130	519500

Weitere Abmessungen auf Anfrage lieferbar / further dimensions available on request