




MICRO CUTTING TOOLS

für GFK, CFK, (Schruppen: Acryl /PMMA)

for GFRP, CFRP, (roughing: acrylic glass/PMMA)

**6-Flute router with fishtail cut
(uncoated),
for GFRP, CFRP,
(roughing: acrylic glass/PMMA)**

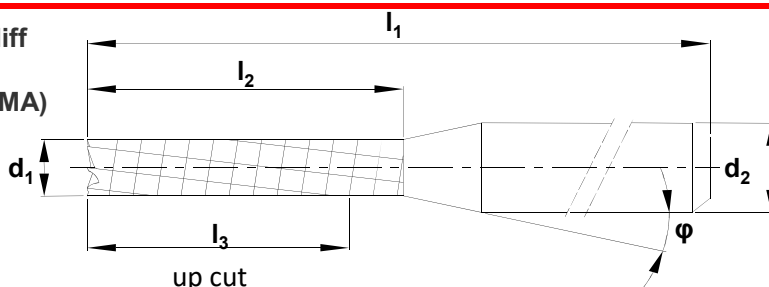

Typ	RZL 631	Type	RZL 631
Norm	HPTec-Werknorm	Standard	HPTec Standard
Spiralwinkel	$\lambda = 19^\circ$	Helix angle	$\lambda = 19^\circ$
Zylinderschaft	DIN 6535 HA	Straight shank	DIN 6535 HA
Beschichtung	keine	Coating	none
Schneidstoff	Vollhartmetall	Cutting material	Solid carbide

[illegible]

Weitere Abmessungen auf Anfrage lieferbar / further dimensions available on request
Werkzeuge mit Schaftdurchmesser 3,175 mm auch in Schaftdurchmesser 3,0 mm verfügbar.
Tools with shank diameter 3,175 mm also available with shank diameter 3,0 mm